


| ITEM NO. | MANUFACTURER | MFG PART # | DESCRIPTION | QTY. |
|----------|---------------------------|------------------|--|------|
| 1 | AMPHENOL ICC | 8655MH0901BLF | Two piece backshell, DB9 | 1 |
| 2 | L-com Global Connectivity | SD9P | Solder Cup D-Sub Connector, DB9 Male | 1 |
| 3 | Belden Wire & Cable | 9535 060100 | Multi-Conductor Cable, 24 AWG, 5C | 1 |
| 4 | HIROSE ELECTRIC CO., LTD. | HR10A-7TP-6P(73) | 6 POS, Circular Connector, Plug, Male Pins Solder Cup Silver | 1 |

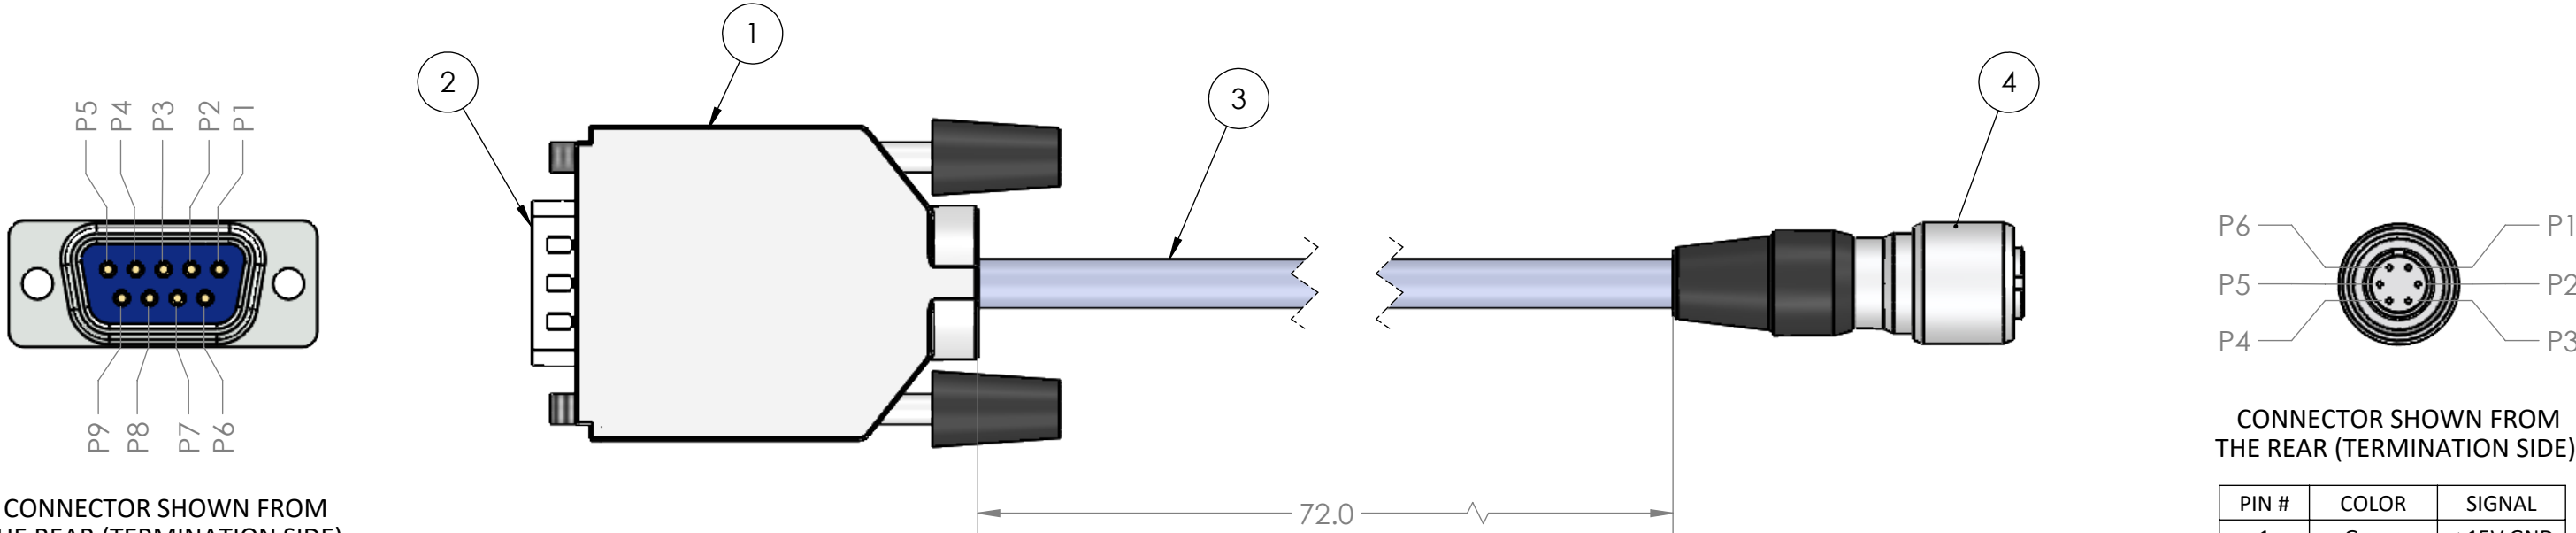

CONNECTOR SHOWN FROM THE REAR (TERMINATION SIDE)



| PIN # | COLOR | SIGNAL |
|-------|-----------|----------|
| 1 | White | 5V GND |
| 2 | Jump w P1 | 5V GND |
| 3 | DNI | DNI |
| 4 | Jump w P5 | ±15V GND |
| 5 | Green | ±15V GND |
| 6 | Brown | 5V |
| 7 | Jump w P6 | 5V |
| 8 | Black | -15V |
| 9 | Red | +15V |

CONNECTOR SHOWN FROM THE REAR (TERMINATION SIDE)

| PIN # | COLOR | SIGNAL |
|-------|-------|----------|
| 1 | Green | ±15V GND |
| 2 | Black | -15V |
| 3 | Red | +15V |
| 4 | Brown | 5V |
| 5 | DNI | DNI |
| 6 | White | 5V GND |

CABLE MANUFACTURER NOTES

1) ALL PIN #S ARE DERIVED DIRECTLY FROM MANUFACTURER DATA-SHEETS - THEY ARE NOT BEING REDEFINED IN THIS DRAWING

| | | | | | |
|---|---------|-----------|---|----------|-------|
| DESIGNED | J Pinon | 12/6/2024 |  | | |
| CHECKED | | | | | |
| APPROVED | | | | | |
| PROPRIETARY AND CONFIDENTIAL | | | D2 DB9 to 6-pin Hirose Cable, 6 Ft | | |
| THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VESCENT TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VESCENT TECHNOLOGIES, INC. IS PROHIBITED. | | | FORMAT | SCALE | UNITS |
|  | | | B | 6:4 | IN |
| | | | PART NO. | REVISION | PAGE |
| | | | VPN00410 | | 1 / 1 |